

CHAMSA
LAYFLAT




Characteristics

Length: 100 Mt / 328 Feet Per coil (special order for longer lengths) temp. range: -20 to +70°C. When the temperature is -15°C or colder, DO NOT handle or transport the hoses.

Construction: P.E. polyethylene yarns of 3 layers. Both the tube and the cap are extruded simultaneously for maximum adhesion. Caution: For liability purposes, if the temperature exceeds 45°C, the working pressure will drop. Consult the factory to ensure a sufficient safety factor. tolerances: ± %5

FLAT HOSE

Advantages

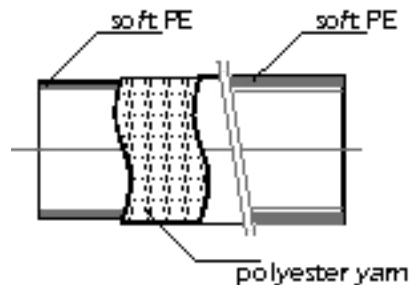

- QUICK DESIGN AND RECOVERY
- LESS LABOR COSTS
- WEED GROWTH REDUCTION
- LIGHT WEIGHT WHICH MAKES HANDLING EASIER
- STORAGE SPACE AND SAVINGS IN TRANSPORTATION

ID	78mm 3"	105mm 4"	128mm 5"	156mm 6"
WALL THICKNESS APPROX.	1,35mm	1,40mm	1,65mm	1,80mm
MAXIMUM WORKING PRESSURE MAXIMUM PRESSURE OF WORK	3 bar 50 psi	3 bar 50 psi	3 bar 50 psi	3 bar 50 psi
COIL WEIGHT	27kg 60 lbs	40kg 88 lbs	49kg 108 lbs	62kg 137 lbs
WEIGHT OF THE COIL	100m 328ft	100m 328ft	100m 328ft	100m 328ft
DIAMETER OF THE COIL	61cm	85cm	87cm	90cm
HEIGHT OF THE COIL	14cm	17,5cm	21cm	25cm
MAXIMUM WORKING PRESSURE WITH CONNECTORS COIL DIAMETER	2 bar 35 psi	2 bar 35 psi	2 bar 35 psi	2 bar 35 psi
	81cm	105cm	107cm	110cm



Flat Male Adapter



SIZE	51mm 2"	76mm 3"	101mm 4"	127mm 5"	152mm 6"
WEIGHT	300gr	800gr	1.000gr	1.890gr	3.010gr
MAXIMUN WORKING PRESSURE	10 bar 170 psi	10 bar 170 psi	6 bar 100 psi	6 bar 100 psi	6 bar 100 psi
QUANTITY PER PACKAGE	12	8	10	6	6
AMOUNT FOR BOX	72	32	20	12	12

- THE EASIEST FLAT ACCESSORIES TO ASSEMBLE IN THE WORLD
- THE FIRST AND ONLY IN THE WORLD
- PATENTED TECHNOLOGY
- HIGHLY RELIABLE, RESISTANT TO HIGH PRESSURES, QUICK AND EASY ASSEMBLY
- UNIVERSAL COMPATIBILITY WITH ALL SIZES OF FLAT HOSES PM FITT COMPATIBILITY
- WITH ALL PVC, NBR, RUBBER, PP AND PE FLAT HOSES
- COMPETITIVE PRICE

flat coupling



SIZE	51mm 2"	76mm 3"	101mm 4"	127mm 5"	152mm 6"
WEIGHT	590gr	1.460gr	1.710gr	3.354gr	5.490gr
MAXIMUN WORKING PRESSURE	10 bar 170 psi	10 bar 170 psi	6 bar 100 psi	6 bar 100 psi	6 bar 100 psi
QUANTITY PER PACKAGE	6	8	6	6	6
AMOUNT FOR BOX	36	16	10	6	6

- THE PM FIT PROVIDES A HIGH WATERPROOF.
- PM FIT DOES NOT CONTAIN ANY FOREIGN SUBSTANCE THAT MAY CHANGE THE TASTE OR SMELL OF THE WATER.
- PM FIT HAS BEEN PRODUCED FROM HIGH-QUALITY POLYPROPYLENE RAW MATERIAL AND HAS IMPACT RESISTANCE.
- PM FIT HAS A NON-POROUS, HOMOGENEOUS INTERNAL SURFACE.
- TOLERANCES: \pm %5



*Available with various distances between central outlets



Chamartin Group, Chamsa

HEADQUARTERS

National Highway IV, Km 31,700
Ciempozuelos 28350, Madrid, Spain
+34 918 019 988/ +34 918 952 048
comercialciempozuelos@grupochamartin.com

Francisco Plasencia

EXTREMADURA

+34 630 972 590
ismaelrangel@grupochamartin.com
Ismael Rangel

MURCIA

+34 629 23 95 68
carlosp@grupochamartin.com
Carlos Pena

SEVILLE

Ctra. N-IV KM. 552.6. 41700
Dos Hermanas, Seville 41015, Spain
+34 954 903 736/ +34 954 908 069
ismaelrangel@grupochamartin.com
Ismael Rangel



VALENCIA

+34 630 972 591
jmanas@grupochamartin.com
Jose Ramon Manas

ZARAGOZA/ POLÍGONO CENTROVIA

C/ Los Angeles 44, 50196
La Muela, Zaragoza, Spain
+34 976 144 778/ +34 976 144 779
jesusalbero@grupochamartin.com
Jesus Hernandez

EXPORT

Ruiz Alarcon Street 27
28014 Madrid, Spain
+34 914 202 884/ +34 914 200 401
info@grupochamartin.com



www.grupochamartin.com